


OPTIGRÜN FKD 25

Drainage and Storage Board

Made from deep-drawn recycled HDPE with water reservoir function, channel system on the underside for drainage, and with diffusion and drainage holes. For use on extensive green roofs with a multi-layer construction and under path surfaces (can be walked on) with > 60 mm substructure. Suitable for use on inverted roofs.

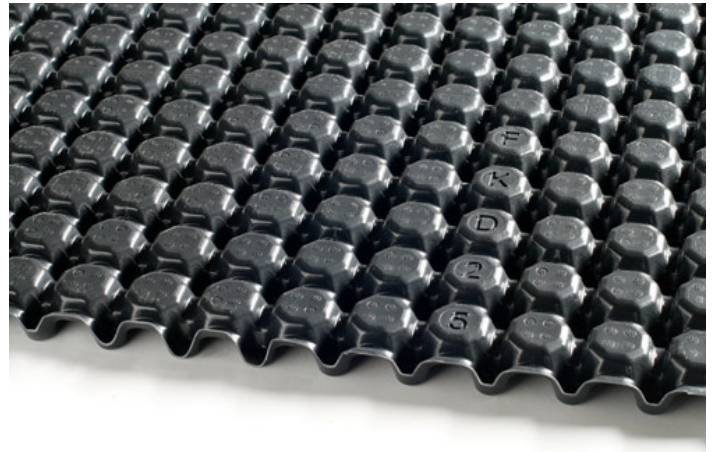

Material	Recycled HDPE
Nominal thickness	approx. 25 mm
Grammage	approx. 1,350 g/m ²
Colour	black/grey
Max. compressive strength unfilled	approx. 200 kN/m ² (DIN EN ISO 25619-2) approx. 90 kN/m ² with 10% compression
Max. compressive strength filled	approx. 175 kN/m ² with 10% compression and 35 mm overfilling
Water discharge capacity (DIN EN ISO 12958)	Measured at: $\sigma = 20$ kPa, soft/hard, MD, with a FIL 105 filter fleece on the upper side: i = 0.01 (=1 % roof pitch): 0.99 l/(m*s) i = 0.02 (=2 % roof pitch): 1.41 l/(m*s) i = 0.05 (=5 % roof pitch): 2.20 l/(m*s) i = 1 (vertical): 10.03 l/(m*s)
Filling volume	small naps facing up = approx. 14.5 l/m ² (surface side) large naps facing up = approx. 7.5 l/m ² (greening side)
Water reservoir unfilled	small naps facing up = approx. 3.6 l/m ² (surface side) large naps facing up = approx. 5.0 l/m ² (greening side)
Reduction in foot fall sound inspected in accordance with EN ISO 10140 assessed in accordance with ISO 717-2	Improvement in foot fall sound for the following layer structures: ΔL_w 33 dB RMS 950 TS, FKD 25, 40 mm chippings, 40 mm concrete slab. ΔL_w 35 dB EPS insulation 120 mm/150 kPa, RMS 950 TS, FKD 25, 40 mm chippings, 40 mm concrete slab.
Quantity/delivered unit	2 m ² /panel = 2.0 x 1.0 m 700 m ² /disposable pallet
Delivery form	700 m ² on disposable pallet 2.05 x 1.05m
Pack size	LxWxH 2,000 x 1,000 x 25 mm
Delivery weight	approx. 2.7 kg/panel - approx. 970.0 kg/full disposable pallet

Area of use

- As a drainage and storage board under extensive green roofs in a triple-layer structure with filter fleece FIL 105 and extensive multi layer substrate E on flat roofs up to RP 5° (= 8.8%).
- As a drainage element under thin-layer pedestrian pathways in gravel beds without compacted base layer without filter fleece directly filled with bedding material. Also lay the FKD 25 with min. 1 row of naps overlapping and overfill with the bedding material (without zero graining, e.g. chippings 2/5) min. approx. 3 cm. The large naps can face either downwards or upwards.

Specific properties

- 100% recycled HDPE
- CE-marked CE-1213-CPD-4265
- Drainage according to DIN 4095
- Safe and targeted guiding of excess water
- Depositing of water in the recesses
- Low weight
- Also suitable for non-pitched roofs
- Lightweight super structure with high drainage capacity
- Recyclable

The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigrün's technical knowledge at the time of publication. Optigrün reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. No liability accepted for misprints.

Optigrün international AG

Am Birkenstock 15 – 19,
72505 Krauchenwies-Göggingen
Tel. +49 7576 772-0, Fax +49 7576 772-299, info@optigruen.de

Optigreen Limited (Service UK only)

Suite G5 Albany Chambers, 26 Bridge Road East
Welwyn Garden City (Herts), AL7 1HL
Phone +44 203 5899400, Fax +44 207 1171664, info@optigreen.co.uk

